

VC 1000-G

Principal dimension		
Length p.p.	142.37	m
Length o.a.	151.72	m
Breadth moulded	23.40	m
Depth moulded	9.50	m
Draught design	7.60 / 8.00	m
Air draught (max)		m

Performance		
Installed power		kW
Main engine	9000	kW
Auxiliary/Emergency power		kW
Service speed (85% MCR)		kn
Trial speed	Abt. 18.5	kn
Endurance		days

Tonnage		
Gross tonnage	Abt. 10371	
Net tonnage	Abt. 4958	
Deadweight	Abt. 13031	t

Cargo hold(s)		
Cargo hold capacity		m ³
Stowage factor		m ³ /t
Tanktop loading		t/m ²


Tanks capacity		
Fresh water	218	m ³
Heavy fuel oil	1051	m ³
Gas oil	140	m ³
Lube oil	62	m ³
Dirty oil	26	m ³
Water ballast	5500	m ³

Container capacity (TEU)		
Reefers (max)	257	-
In hold	322	-
On hatches/Deck	714	-
Total capacity	1036	-
Total capacity of 14t TEU	720	-

Crane(s)		
No. crane(s)	0	-
Max. lift capacity	0	t

Container capacity (mix)		
20 ft		-
40 ft	Abt. 492	-
45 ft		-



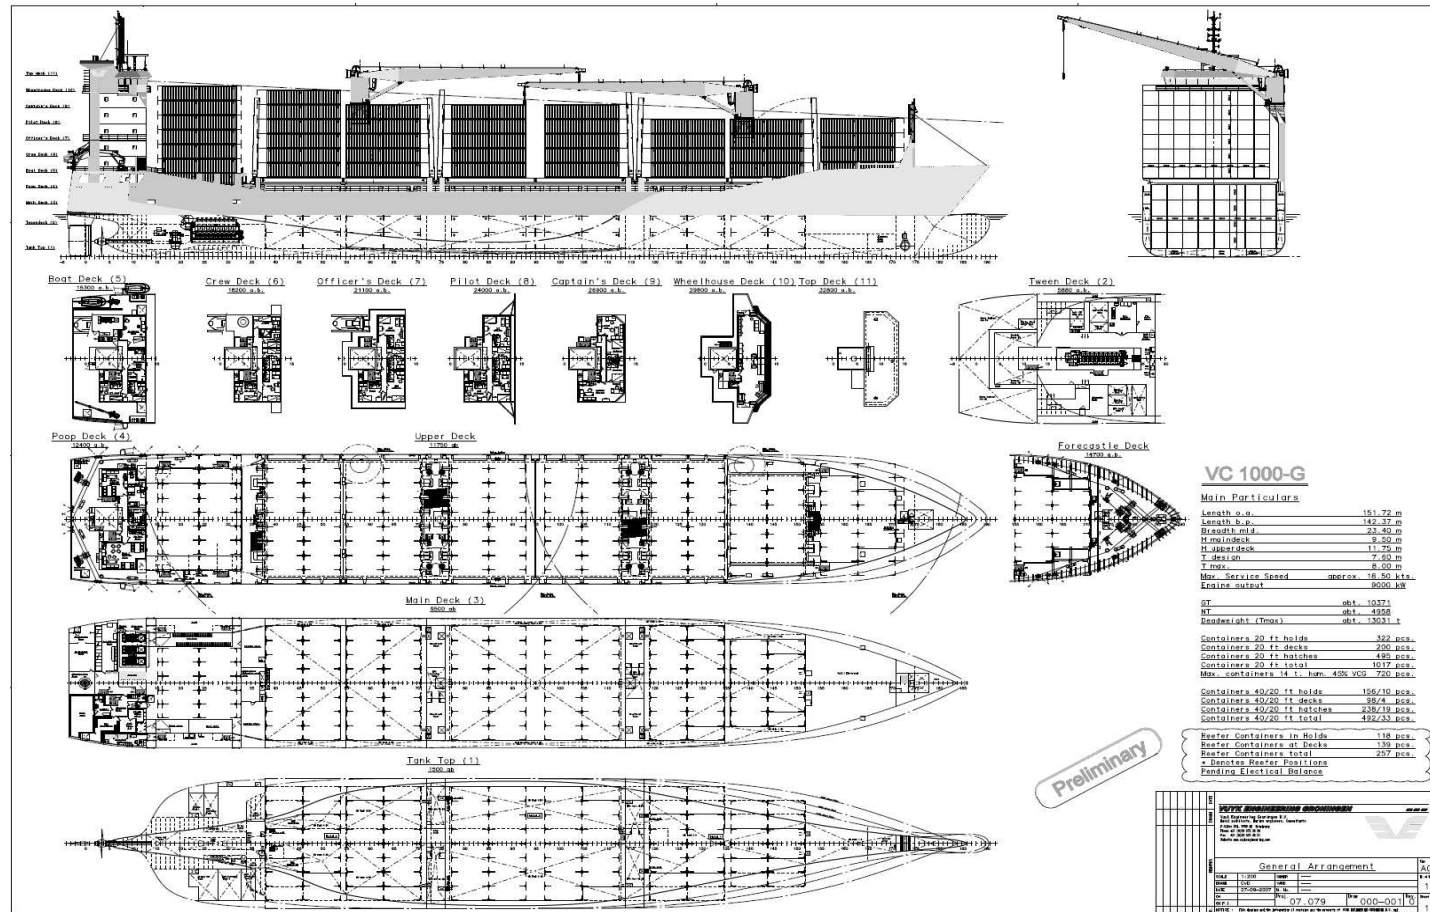

- Notation**
- Hull: Hull MACH—Container ship Unrestricted navigation
 - Machinery: AUT-UMS
 - Ice class 1A Finnish/Swedish - INWATERSURVEY

General